

Product Details

- Gauges: 26 gauge
- Finish: Valspar Weather X
- Substrate: Galvalume
- Warranty: 25 year in Galvalume & 40 year in painted
- Stiffener bends to reduce oil caning
- All panels can be cut to desired lengths
- For use on slopes 1/12 or greater to maintain water drainage




Grade Specifications


- ASTM A-792 AZ50 Grade 80 Structural Steel
- Thickness: 0.0185
- View www.energystar.com for exact ratings.

Application


- Synthetic underlayment is recommended to help eliminate condensation issues.
- Open purlin applications on commercial or agricultural applications should be spaced no more than 4ft on center.

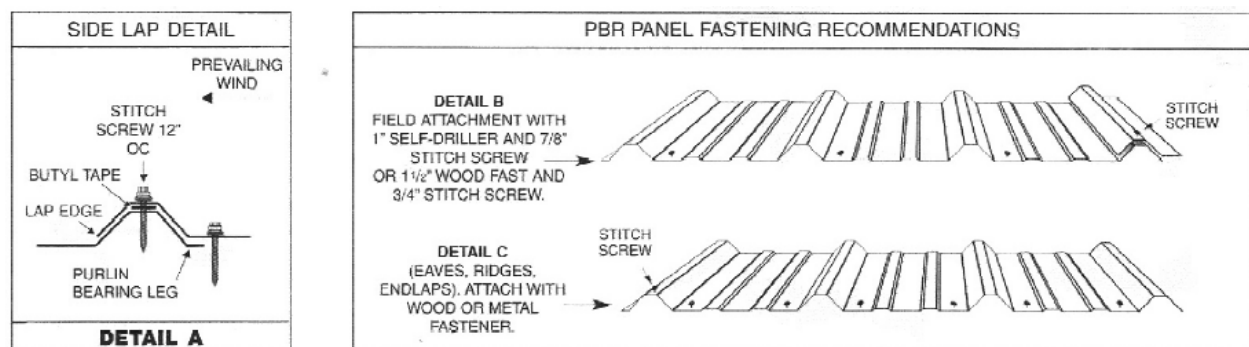


Ridge Cap RC7

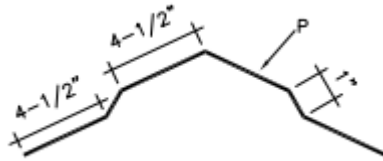


Side Wall Flashing (SW2)




Gable Rake GR7




Preformed Valley (PV2)




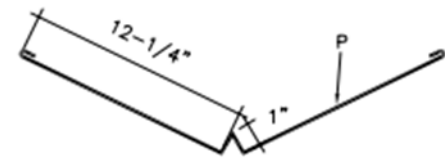


J-Channel JC5

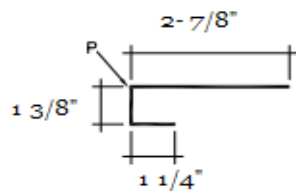

Transition Flashing (TF1)

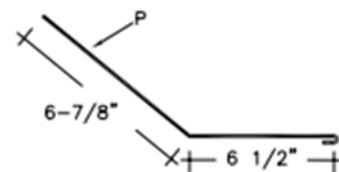

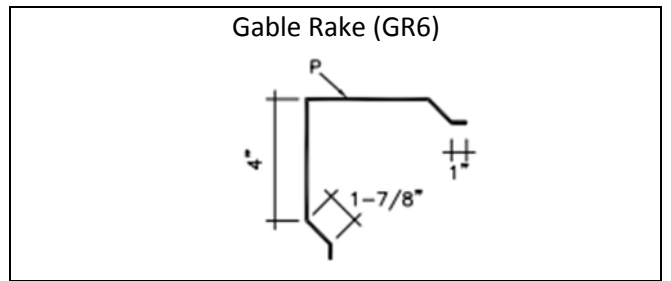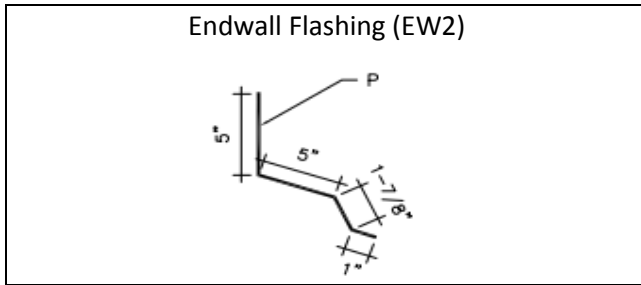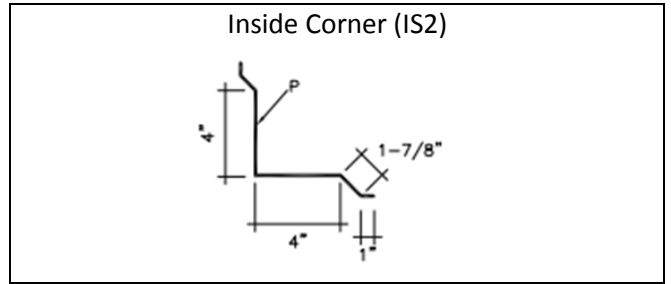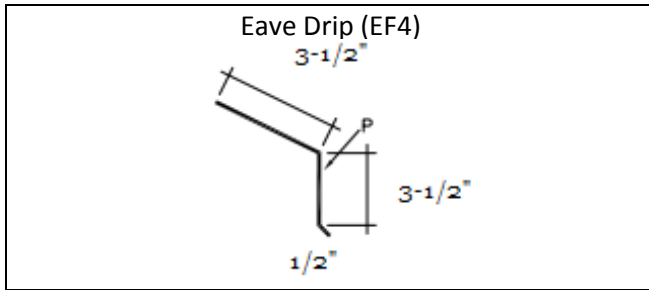

Custom Trim available per request.

Drawings are required for custom trim approval.